

expona superplank



Silverwood 1950

expona supertile



Mocha 2011 with Cream 0032 5mm Feature Strip



Truffle **2010** 457mm x 457mm



Mocha **2011** 457mm x 457mm



Taupe **2012** 457mm x 457mm



Latte **2013** 457mm x 457mm



Ivory **2014** 457mm x 457mm



Riverstone **2015** 457mm x 457mm



Ivory **2014** with Cream **0032** 5mm Feature strip



Riverstone **2015** with Cream **0032** 5mm Feature strip

Feature Strips

Applying a 5mm feature strip between the tiles in either a complementary or a contrast colour can create a classic yet stylish look

Cream 0032

Gold 0026

Silver 0025

Mid Grey 5752

Copper 0033

Terracotta 0034


Brown 0031

Black 0028





Riverstone **2015**

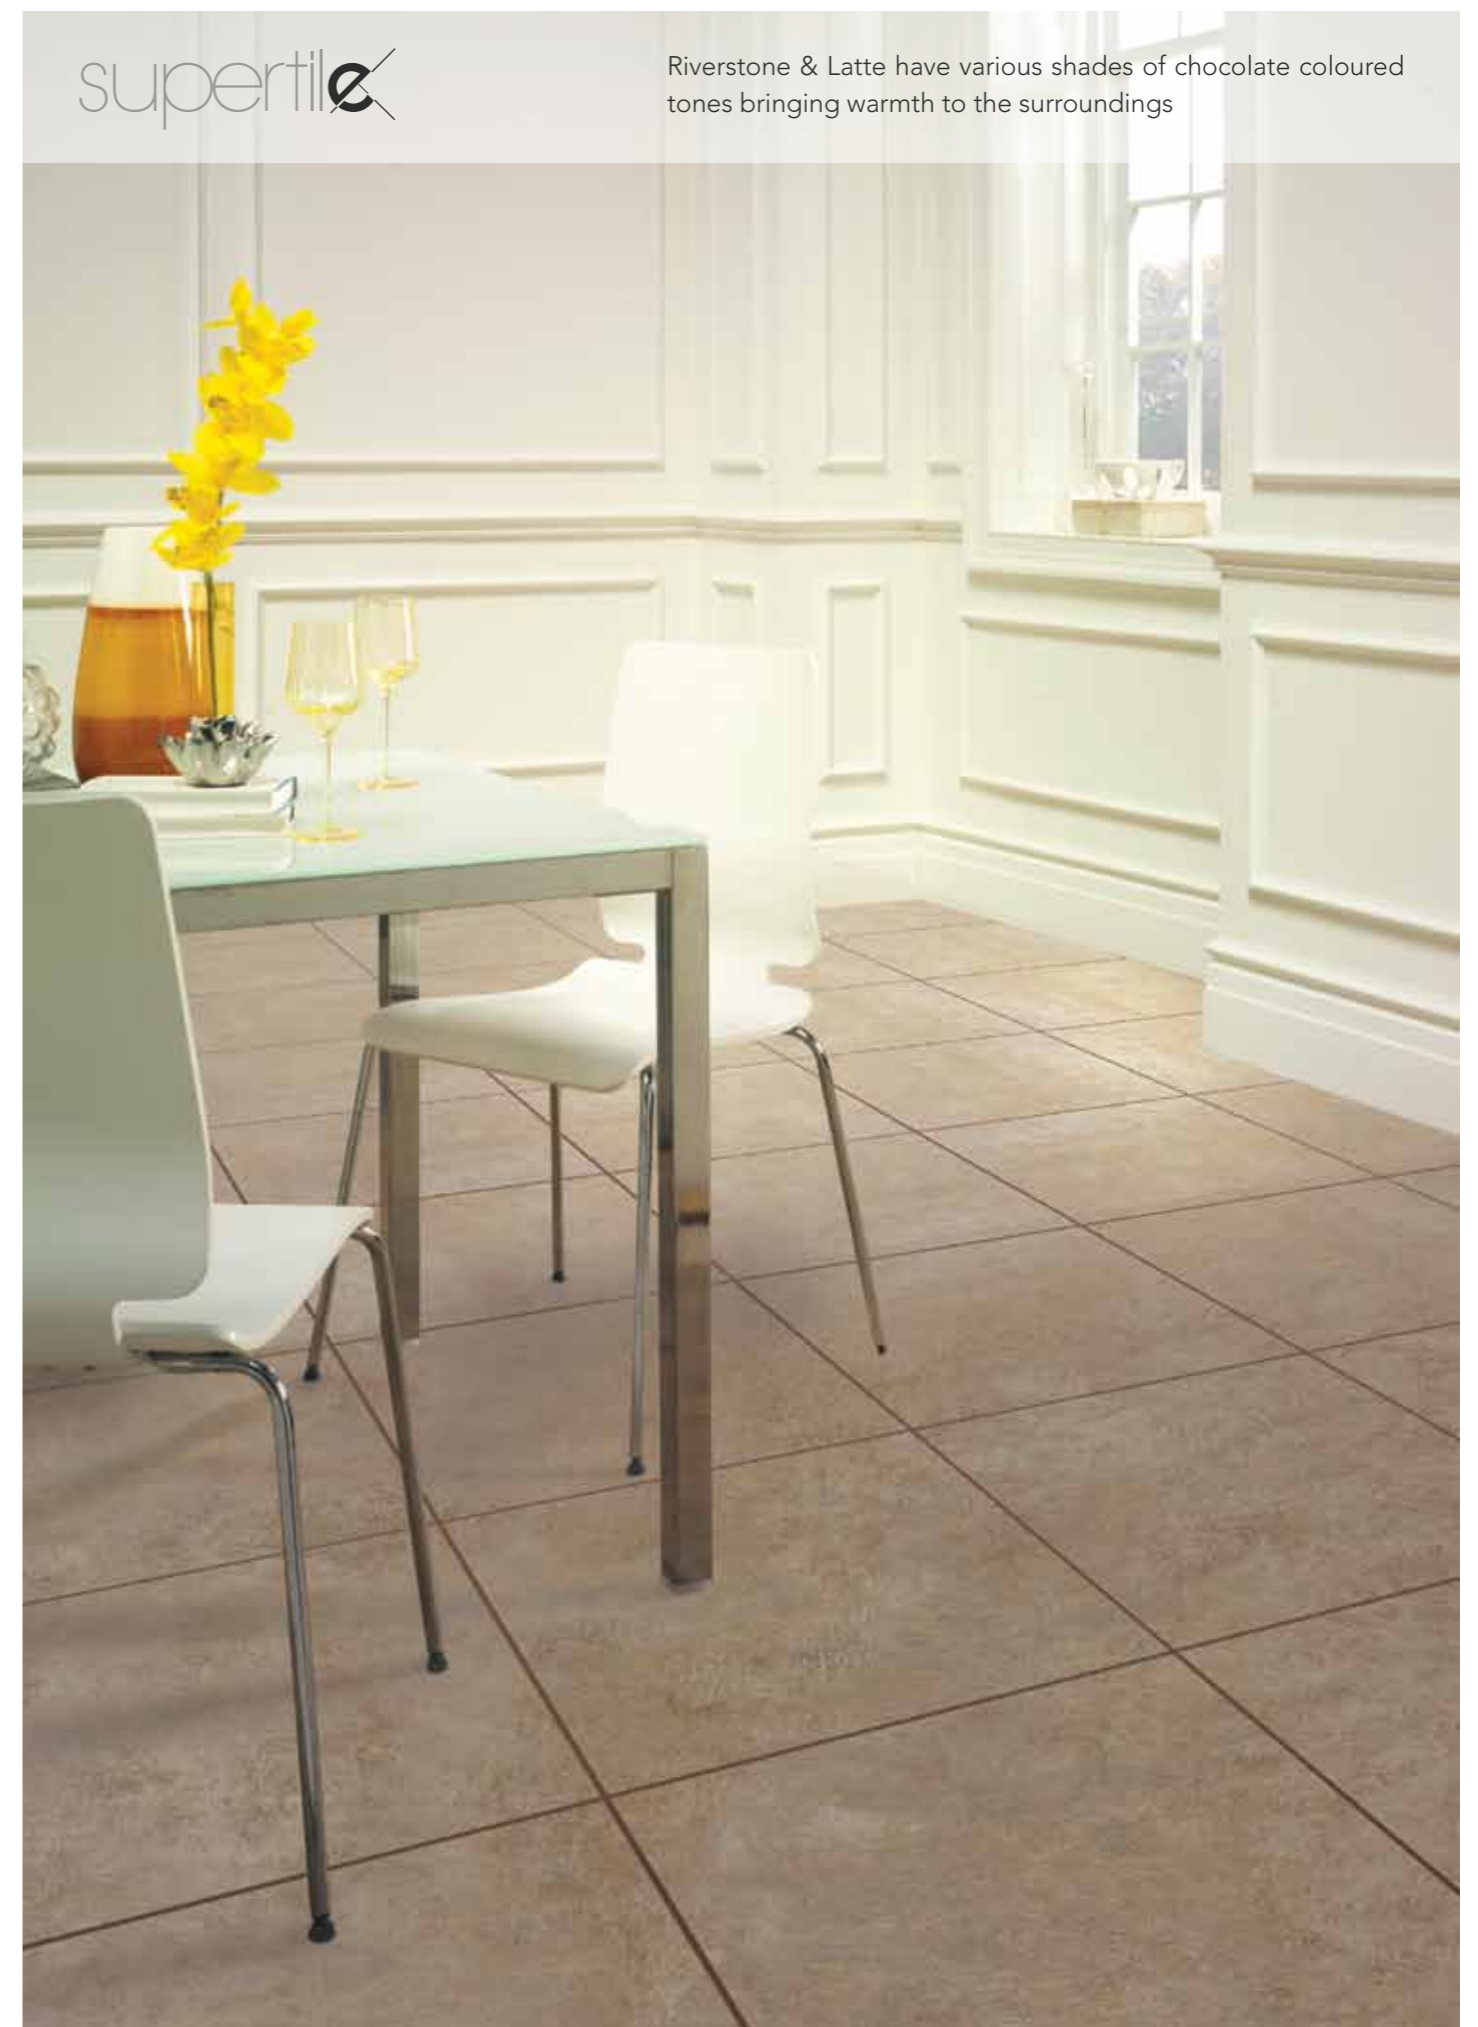


Riverstone & Latte have various shades of chocolate coloured tones bringing warmth to the surroundings

Latte **2013** with Brown **0031** 5mm Feature Strip



Ivory **2014**

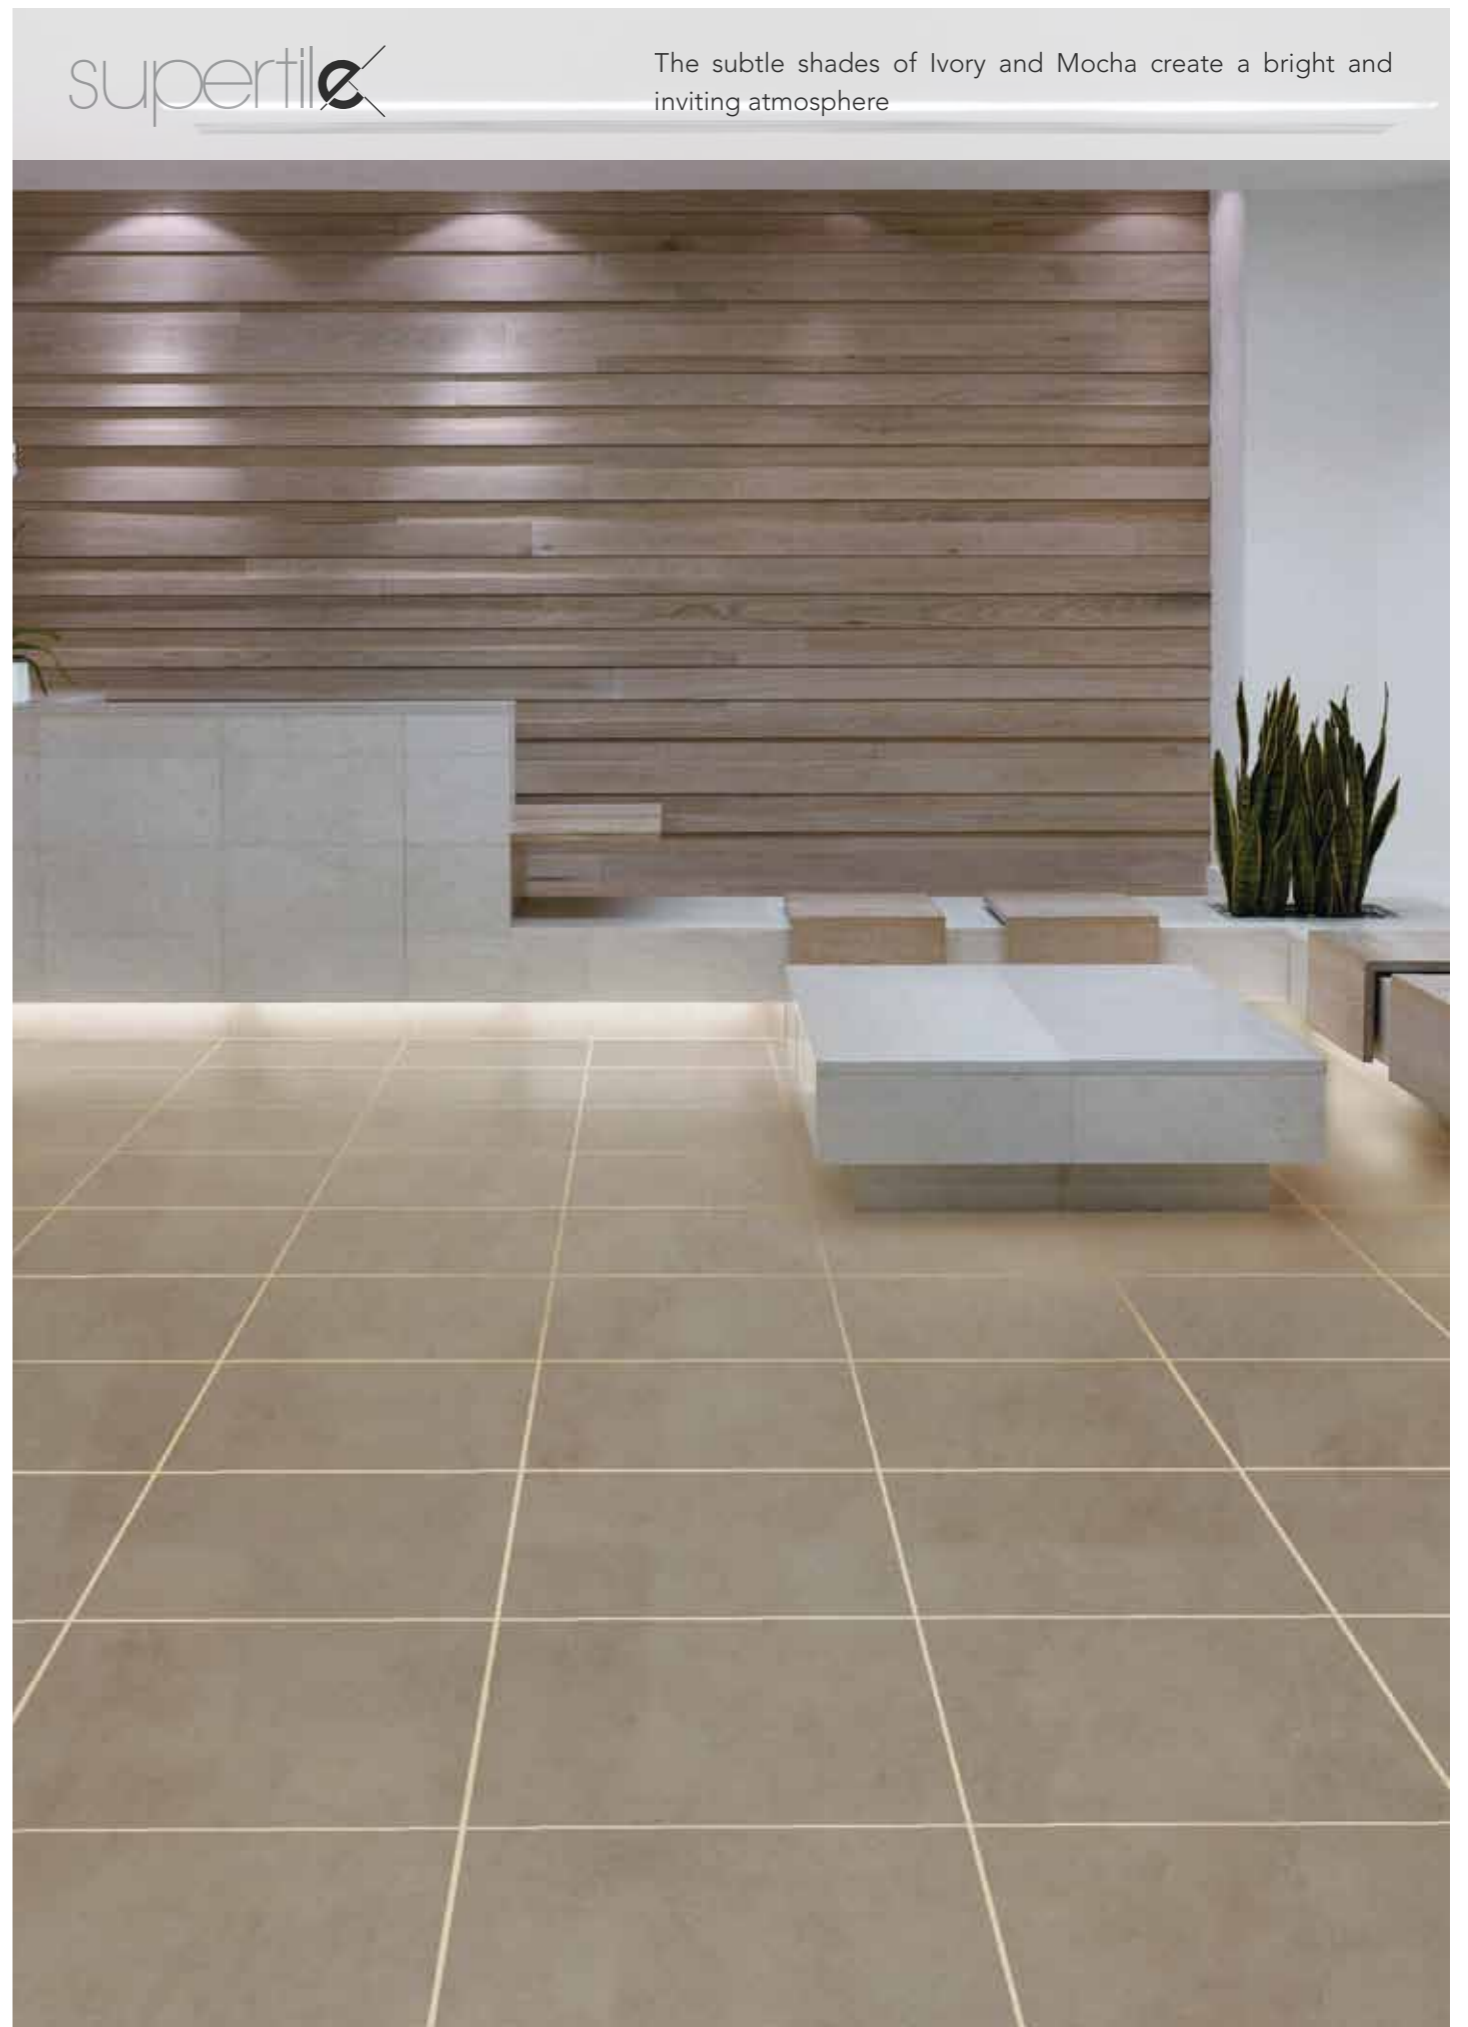

supertile

The subtle shades of Ivory and Mocha create a bright and inviting atmosphere

Mocha **2011** with Cream **0032** 5mm Feature Strip



Truffle **2010** with Black **0028** 5mm Feature Strip



Taupe **2012** with Gold **0026** 5mm Feature Strip



Blond Limed Oak **1912** 203mm x 1219mm



Coromandel **1960** 184mm x 1219mm



Honey Limed Oak **1964** 203mm x 1219mm



Jarrah **1959** 184mm x 1219mm



Brown Limed Oak **1913** 203mm x 1219mm



Antique **1955** 152mm x 1219mm



Honey Oak **1914** 184mm x 1219mm



Light Pine **1963** 152mm x 1219mm



Oak **1958** 184mm x 1219mm



Rimu **1928** 184mm x 1219mm



Red Oak **1948** 203mm x 1219mm



Victorian Ash **1961** 184mm x 1219mm



Silverwood **1950** 203mm x 1219mm




Ghost Gum **1953** 203mm x 1219mm







Silverwood **1950**

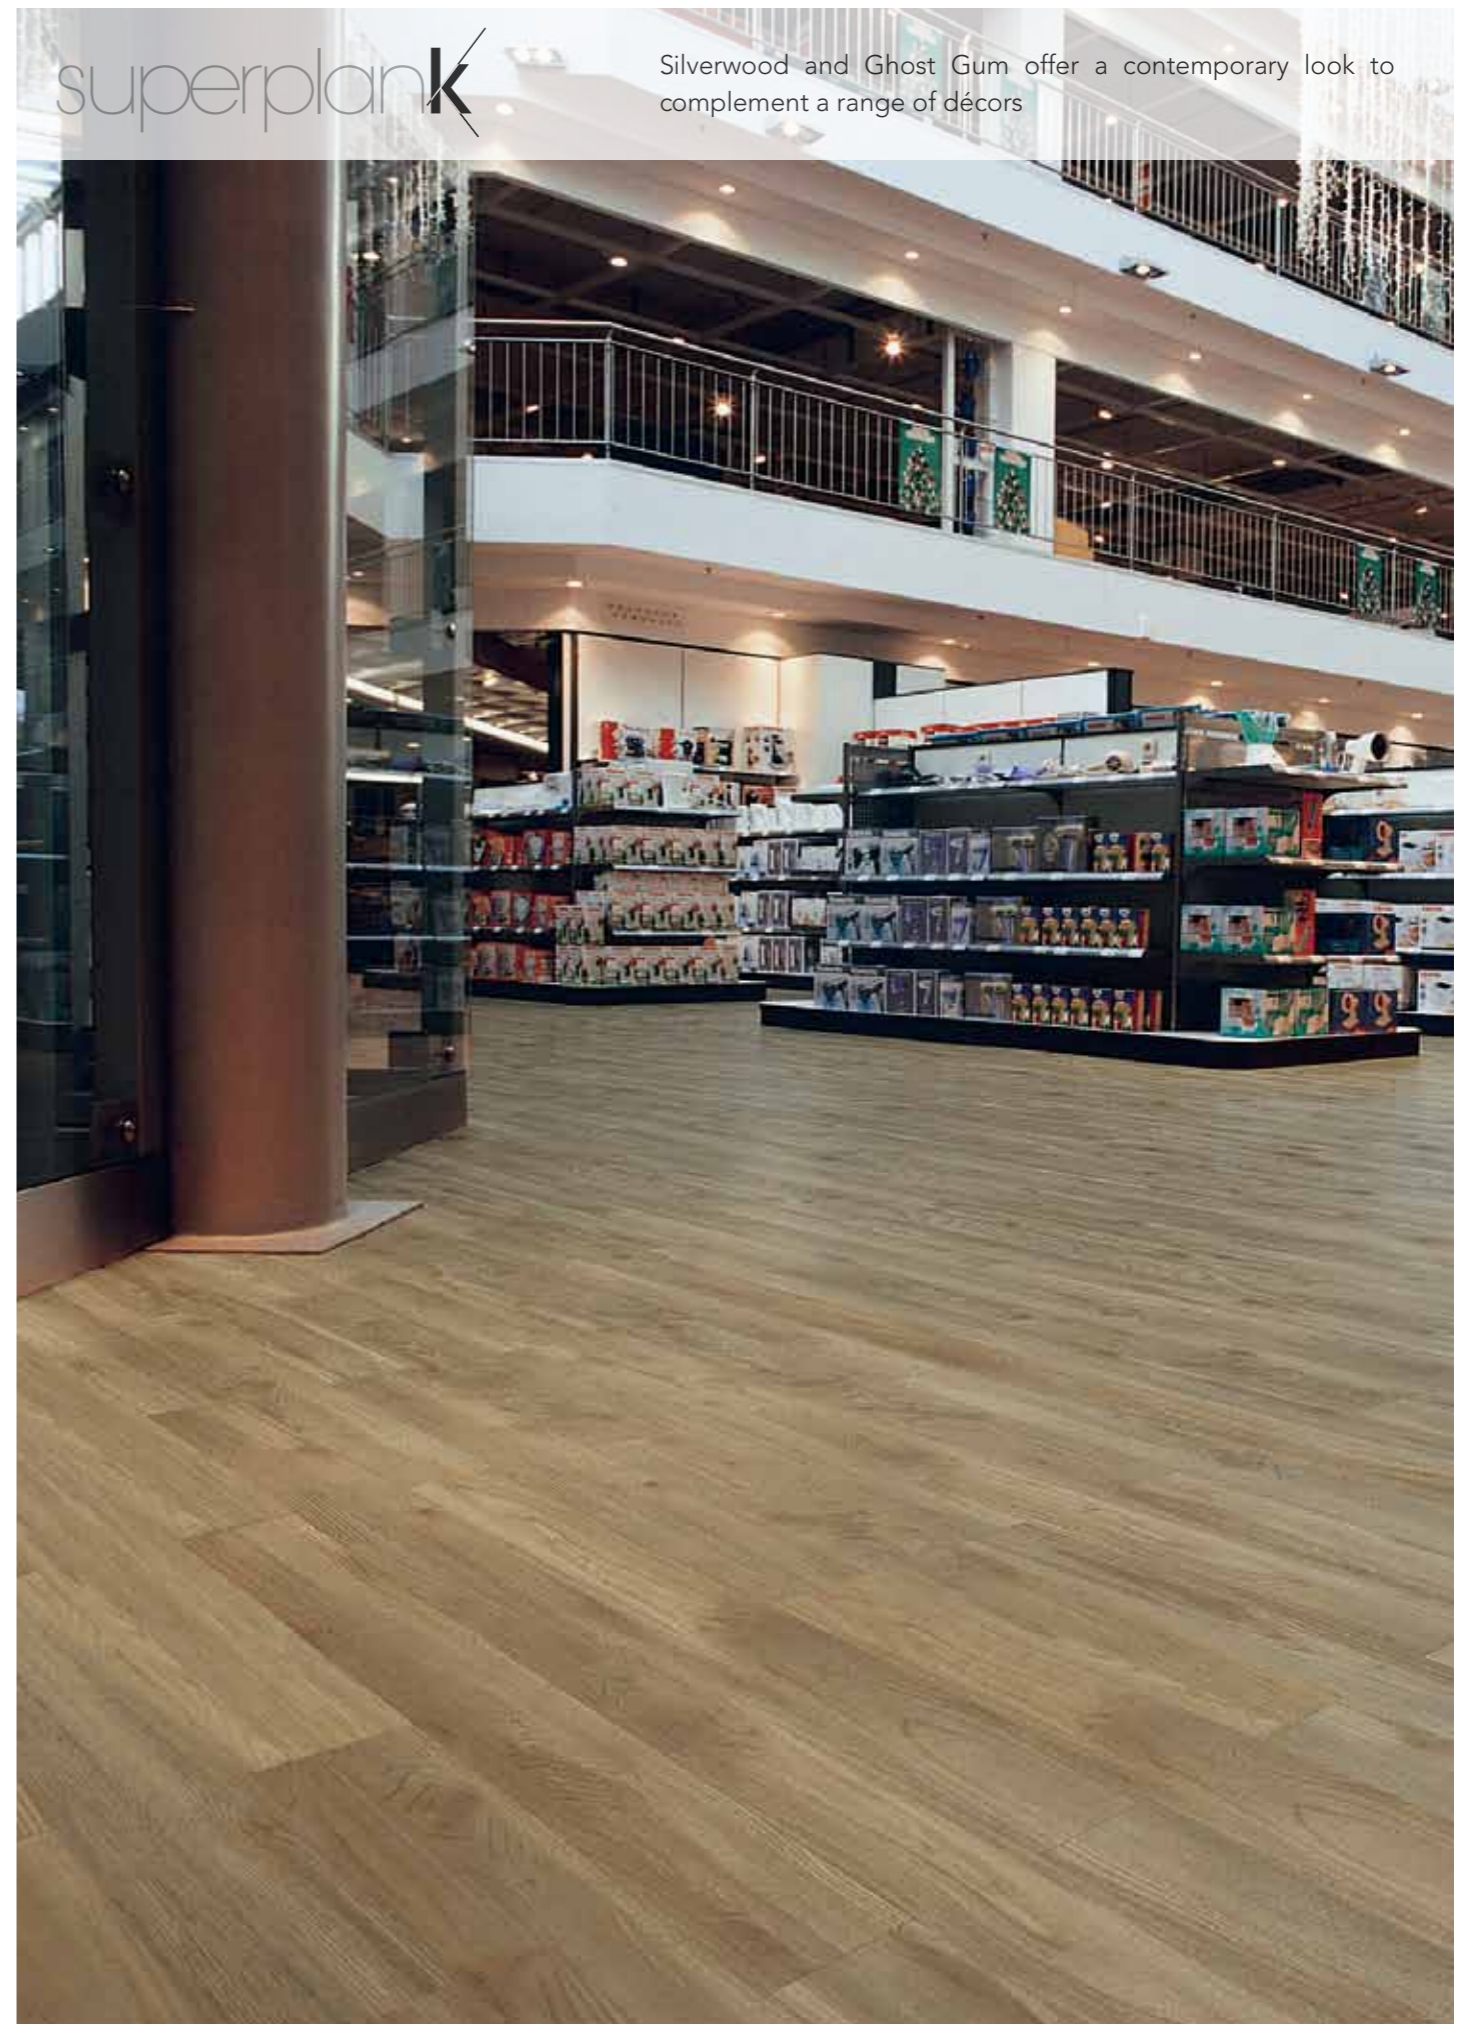

Ghost Gum **1953**

Silverwood and Ghost Gum offer a contemporary look to complement a range of décors



Antique **1955**



Coramandel **1960**



Jarrah **1959**

superplank

The rich tones of Jarrah, Coramandel and Antique create warmth and contrast to a neutral coloured space



Red Oak **1948**



Oak **1958**



Honey Oak **1914**



Rimu **1928**



Victorian Ash **1961**



Light Pine **1963**

superplank

The patterns and textures of Rimu, Light Pine and Victorian Ash add character and charm to a room

CUSTOMER GUARANTEE

All products purchased from the range are guaranteed for a full 15 years against normal wear and tear in a residential environment and 10 years in a commercial environment provided they have been fitted correctly and maintained in accordance with the manufacturer's instructions.*

In order to make a claim, customers must apply in writing indicating where their flooring was purchased and provide satisfactory proof of purchase.

This guarantee only applies in the event of the visible wearing out of the decorative pattern on the surface within the 15 year Residential or 10 year Commercial guarantee period from the time of purchase, provided the flooring has been subject to normal usage in the recommended environment.

It does not cover general misuse, and we suggest that adequate UV protection be taken against products being installed in direct sunlight as fading may occur. It is the manufacturer's recommendation that felt or teflon pads are used for protection under chairs and other furniture which will help to prevent scratching and marring of your floor's finish.

When moving any heavy objects please place a plywood panel over your vinyl floor.

In the event of the manufacturers of Expona Superplank or Supertile accepting that a claim is valid under this guarantee, they will either repair the flooring or supply replacement flooring free of charge. In the unlikely event of the flooring no longer being in stock, then flooring of equivalent quality will be provided.

*These guarantees are provided by the manufacturer and are in addition to other rights and remedies of the consumer under a law in relation to the goods. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.



PHthalate FREE

Green Tag ^{Cert™} Certified Flooring

Polyflor's Expona Superplank & Supertile has achieved a GreenTag ^{Cert™} SILVER Plus Rating, meaning it has a Very Good status as a sustainable product that is healthy for use in any home or commercial project. Global GreenTag ^{Cert™} is the only ACCC (Australian Competition and Consumer Commission) approved National Certification Mark in the green building materials sector. Meaning you can be sure that you are purchasing a product that is independently certified as environmentally preferred.





GreenTag ^{Cert™} is an independent third party, green product rating and certification ecolable, underpinned by rigorous scientific and Life Cycle Assessment (LCA) processes. In short, GreenTag ^{Cert™} helps the consumer identify products that are environmentally preferred, for use in their home via an independently audited and industry recognised whole of life cycle certification system. Ecospecifier's GreenTag ^{Cert™} is recognised by the Green Building Council of Australia (GBCA) and the New Zealand Green Building Council (NZGBC).







All Expona LVT (Luxury Vinyl Tile & Plank) products, including Superplank & Supertile, are 100% recyclable and are recycled in Australia and New Zealand through the Recofloor - Vinyl Take Back Scheme.

The Recofloor scheme reduces the amount of vinyl flooring going to local landfill. Through the localised scheme, flooring off-cuts from the installation process are recycled back into new flooring. Uplifted or end of life material is downcycled into traffic calming products such as traffic cone and road barrier bases.

Tile & Plank patterns may contain variations in markings and shading as part of their design. By following a policy of continuous development, we reserve the right to add or delete patterns and improve technical specifications without prior notice. Reproductions in printing and photography are for guidance only, they give a general indication of colour and are not necessarily representative of the overall effect or design. For colour selection an original sample is recommended.

TECHNICAL DATA	Characteristics	Standards	Unit	EXPONA SUPERTILE
 <p>Heterogeneous vinyl floorcovering available as tiles based on a phototechnical reproduction with a transparent wear layer and a factory applied polyurethane surface treatment for contract application.</p>  	Type of floorcovering	EN 649		heterogeneous, PVC
	Surface treatment			 tile with bevelled edges
	Description			
	Colours			6
	Performance classification	EN 685		23, 33, 42
	Gauge	EN 428	mm	2,5
	Wear layer thickness	EN 429	mm	0,55
	Tile size	EN 427	mm	16 @ 457mm x 457mm = 3.34m ²
	Residual indentation	EN 433	mm	≤0,1
	Colour fastness to artificial light	ISO 105-BO2 method 3	level	≥6
	Behaviour to fire	EN 13501-1		B _{fl} - s1
	Slip resistance	DIN 51130 EN 13893		R10 DS
	Impact sound reduction	EN 140-8	dB	ca. 4
	Resistance to thermal conductivity	DIN 52612	m ² k/w	0,02
	Assessment of static electrical propensity	EN 1815	kV	<2

Electrical resistance to earth	EN 1081	Ohm	ca. 10 ¹¹
Leakage to earth	VDE 0100 §24	Ohm	> 5 x 10 ⁴
Chemical resistance	EN 423		*
Abrasion group	EN 649		T
Castor chair suitability	EN 425		yes, type W, EN 12 529
Underfloor heating suitability			suitable max. 27° C

TECHNICAL DATA	Characteristics	Standards	Unit	EXPONA SUPERPLANK
 <p>Heterogeneous vinyl floorcovering available as planks based on a phototechnical reproduction with a transparent wear layer and a factory applied polyurethane surface treatment for contract application.</p>  	Type of floorcovering	EN 649		heterogeneous, PVC
	Surface treatment			 plank
	Description			
	Colours			14
	Performance classification	EN 685		23, 33, 42
	Gauge	EN 428	mm	2,5
	Wear layer thickness	EN 429	mm	0,55
	Plank sizes	EN 427	mm	18 @ 152mm x 1219mm = 3.34m ² 15 @ 184mm x 1219mm = 3.37m ² 14 @ 203mm x 1219mm = 3.46m ²
	Residual indentation	EN 433	mm	≤0,1
	Colour fastness to artificial light	ISO 105-BO2 method 3	level	≥6
	Behaviour to fire	EN 13501-1		B _{fl} - s1
	Slip resistance	DIN 51130 EN 13893		R10 DS
	Impact sound reduction	EN 140-8	dB	ca. 4
	Resistance to thermal conductivity	DIN 52612	m ² k/w	0,02
	Assessment of static electrical propensity	EN 1815	kV	<2

Electrical resistance to earth	EN 1081	Ohm	ca. 10 ¹¹
Leakage to earth	VDE 0100 §24	Ohm	> 5 x 10 ⁴
Chemical resistance	EN 423		*
Abrasion group	EN 649		T
Castor chair suitability	EN 425		yes, type W, EN 12 529
Underfloor heating suitability			suitable max. 27° C

* Resistance depending on concentration and time of exposure, in case of increased impact of oils, grease, acids, alkalis and other aggressive chemicals - please contact Polyflor.



Honey Lined Oak 1964



Riverstone 2015 with Black 0028 5mm Feature Strip

POLYFLOR™
COVERING THE WORLD

Polyflor Australia Pty Ltd
ABN 68 007 134 518

59-65 Wedgewood Road
Hallam VIC 3803
Australia
P: 1800 777 425
F: 03 9215 4444
E: sales@polyflor.com.au

www.polyflor.com.au

