

Geotone Quicklay PUR

PRODUCT SPECIFICATION

KEY FEATURES

- Loose lay resilient flooring designed for adhesive-free installation.
- Install over substrates up to 97% RH.
- Immediate weld for seamless finish.
- Low VOC emissions.
- 100% recyclable & reusable.



□ Pebble Time 6267

PRODUCT FORMAT	Standard	Result
Gauge	ISO 24346 (EN 428)	2.2mm
Wear Layer	ISO 24340 (EN 429)	1.0mm
Total Weight	ISO 23997 (EN 430)	2700g/m ²
Finish		PUR

SHEET SIZE	Size	Shades	Quantity per Box	Coverage per Box/Roll
Sheet	2m x 20m	18		40m ²

PERFORMANCE REQUIREMENTS	Standard	Result
General Performance	ISO 10582 (EN 649) ASTM F1303	Conforms Type II, Grade I, Class B Backing
Use Area	ISO 10874 (EN 685)	23, 34, 42
Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 Appendix D ASTM D2047	Class DS R10 R10 SCOF ≥0.5
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 660-2	Group T
Reaction to Fire	EN 13501-1 ASTM E648 CAN/ULC S-102.2 AS ISO 9239.1	Class Bfl-S1 Class 1 FSV < 300; SDV < 500 >8.0kW/m ²
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM 1914 ASTM F970 (Modified) ISO 24343-1 (EN 433)	≤0.005" ≤0.005" @ 750psi ≤0.10mm

Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Furniture Leg	ISO 16581 (EN 424)	Complies
Dimensional Stability	ISO 23999 (EN 434)	≤0.40%
Flexibility	ISO 24344 (EN 435) ASTM F137	(Method A) Pass 20mm ø 0.25" Pass
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

SUSTAINABILITY	Standard	Result
Recyclable & Reusable		100%
Recycled Content		Contains recycled material
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1 Classification		Certified

ACOUSTIC PERFORMANCE	Standard	Result
Impact Sound Reduction	ISO 10140-3	6dB

MAINTENANCE PERFORMANCE	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance
Alco Hand Gels	Compatible for use with most commonly used alco-based hand gels.	
Steam Cleaning	Suitable for steam cleaning on a periodic basis	

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection. Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.

HYGIENE	Standard	Result
Bacterial Resistance	ISO 846 Part C	Does not favour growth



Geotone Quicklay PUR

RANGE SHADES

18 Shades

Sheet Size : 2 x 20m




6267 PEBBLE TIME
NCS S 2500-N

W/R 6267
LRV 49



6268 FOUNTAIN STONE
NCS S 4500-N

W/R 6268
LRV 31

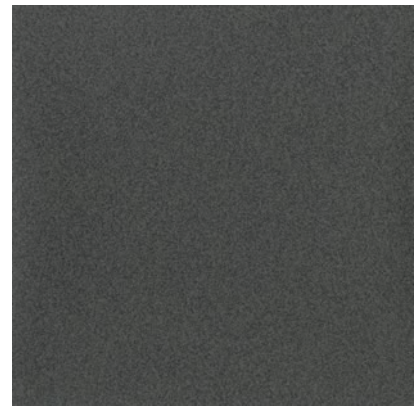


6269 MAGNETITE
NCS S 7500-N

W/R 6269
LRV 10




6271 PEARL GREY
NCS S 1502-B

W/R 6271
LRV 62

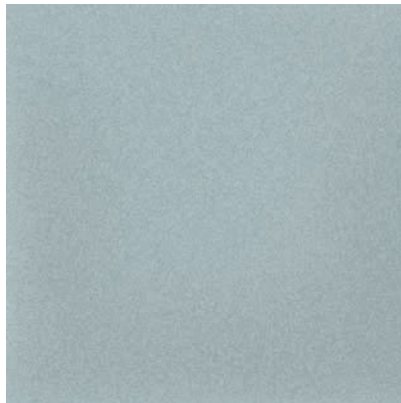


6272 FLINT EARTH
NCS S 2010-B

W/R 6272
LRV 42

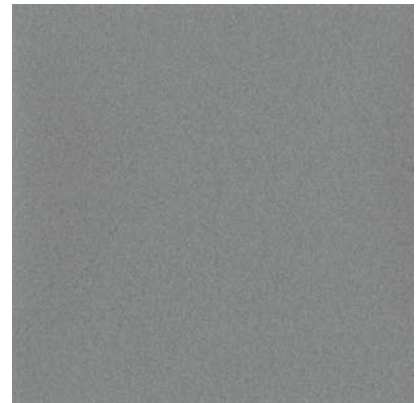


6273 CLASSIC ROCK
NCS S 4502-B

W/R 6273
LRV 26

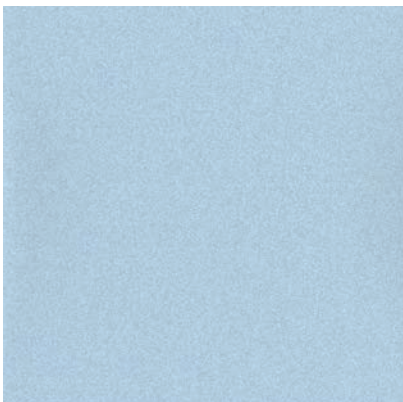


6274 ALPINE BLUE
NCS S 1020-R80B

W/R 6274
LRV 53

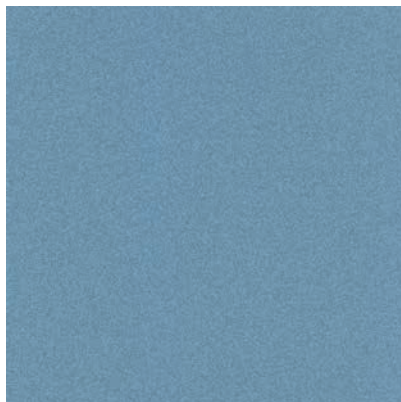

6276 PADDLESTONE
NCS S 3030-R90B

W/R 6276
LRV 28

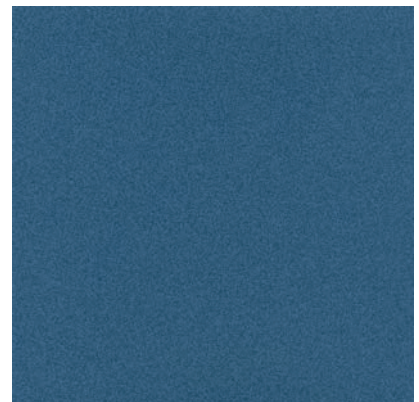

6277 STAR SAPPHIRE
NCS S 5030-R90B

W/R 6277
LRV 13



6278 PREHNITE
NCS S 1510-G40Y W/R 6278
LRV 60



6279 AVENTURINE
NCS S 3020-G30Y W/R 6279
LRV 32




6280 PERIWINKLE PINK
NCS S 1015-R20B W/R 6280
LRV 64



6281 GLACIAL MIST
NCS S 1505-Y20R W/R 6281
LRV 62




6282 SHINGLE BEACH
NCS S 3005-Y20R W/R 6282
LRV 43

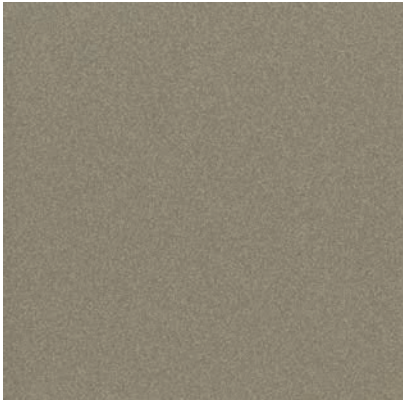

6283 VOLCANICS
NCS S 5005-Y20R W/R 6283
LRV 25



6284 SAND BAR
NCS S 1510-Y40R W/R 6284
LRV 59

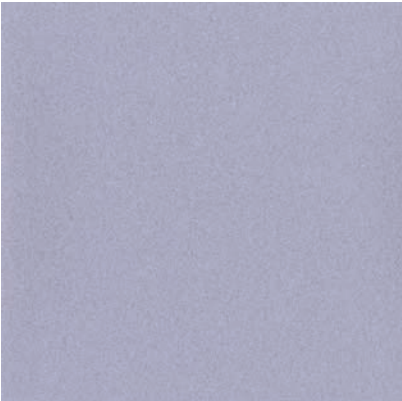

6285 TOASTED MAUVE
NCS S 2020-R60B W/R 6285
LRV 40



6286 SOLENT GOLD
NCS S 3040-Y50R W/R 6286
LRV 25