

VC Tiles

PRODUCT SPECIFICATION

KEY FEATURES

- Classic economical value.
- Consists of vinyl composition tiles.
- Provides durable flooring.
- Perfect for supermarkets, retail stores, schools and storage areas.



PRODUCT FORMAT	Standard	Result
Gauge	ISO 24346 (EN 428)	3.0mm (2.0mm only in Western Australia)
Total Weight	ISO 23997 (EN 430)	4400g/m ²

TILE SIZE	Gauge	Size	Shades	Quantity per Box	Coverage per Box/Roll
Tile	2.0mm	300mm x 300mm	6	55	4.95m ²
	3.0mm	300mm x 300mm	5	37	3.33m ²

PERFORMANCE REQUIREMENTS	Standard	Result
General Performance	ISO 10595 : 2012 (BS EN)	Conforms
Slip Resistance	AS 4586 App D	Product is intended to be sealed once installed, slip performance should be considered with regards to the sealer used
Reaction to Fire	AS ISO 9239.1	≥ 8kW/m ²
Residual Indentation	ISO 24343-3 (EN 433)	<0.10
Dimensional Stability	ISO 23999 (EN 434)	≤0.20%
Flexibility	ISO 24344 (Method B)	≤25mm
Application		Polyflor VC Tile range is recommended as a cost effective flooring solution for public and commercial buildings, e.g. supermarkets, retail, stores, schools, commercial premises, storage areas. For further advice on specific applications consult Polyflor.

VC Tiles

RANGE SHADES

9 Shades


Tile Size : 300mm x 300mm



157 MOONDUST




173 CAPPUCCINO

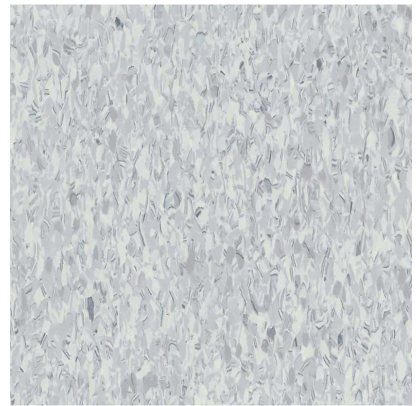


727 EIFFEL TOWER



1102 PEBBLE

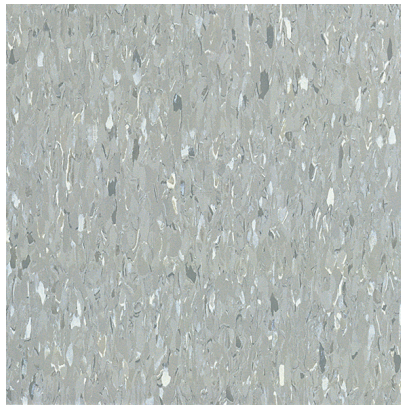

1104 DUSKY GREY

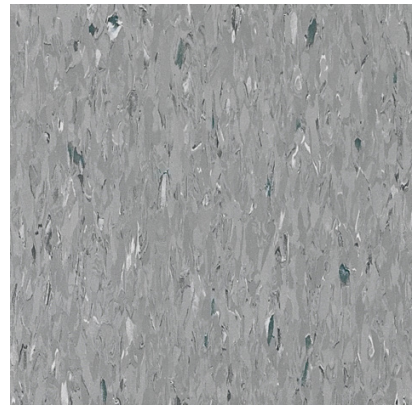

1107 STORM CLOUD



1117 MERINO



2222 MOSSMAN



2230 NOUGAT