


# Laneway Collection Specs

## PRODUCT SPECIFICATION

### KEY FEATURES

- Knot and grain detailing, incorporating a mix of modern and bold shades.
- Designed to withstand years of family living.
- Suitable for residential applications.
- Perfect choice for a sleek and sophisticated look.

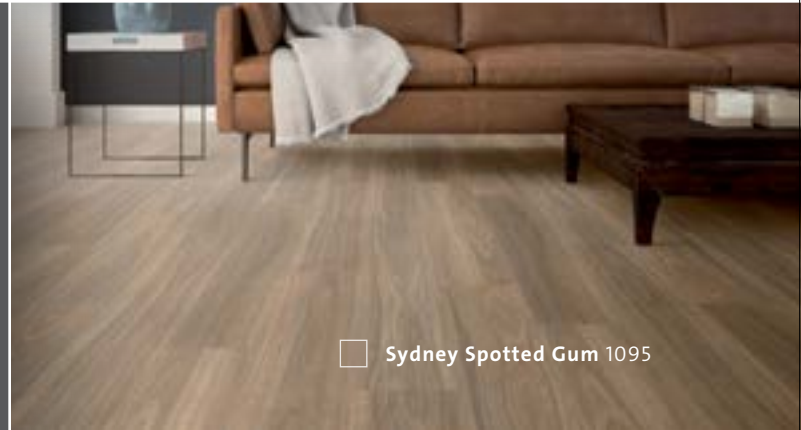

□ Sydney Spotted Gum 1095

PRODUCT FORMAT	Standard	Result
Gauge	ISO 24246 (EN 428)	5.0mm
Wear Layer	ISO 24340 (EN 429)	0.55mm
Total Weight	ISO 23997 (EN 430)	8000g/m <sup>2</sup>
Finish		PU

PLANK SIZE	Size	Shades	Quantity per Box	Coverage per Box/Roll
Plank	177.8mm x 1219.2mm	6	10	2.17m <sup>2</sup>
	185mm x 1505mm	9	8	2.23m <sup>2</sup>

PERFORMANCE REQUIREMENTS	Standard	Result
General Performance	ISO 10582 (EN 649)	Heterogeneous, PVC
Use Area	ISO 10874 (EN 685)	23, 34, 43
Slip Resistance	AS 4586 App D	R10
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 660-2	Group T
Reaction to Fire	AS ISO 9239.1	Exceeds Requirements
Residual Indentation	ISO 24343-1 (EN 433)	Pass
Castor Chair (continuous use)	ISO 4918 (EN 425)	Yes / Type W
Underfloor Heating	EN 1264-2	Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method A)	≥6

\*Average test value from current production.

SUSTAINABILITY	Standard	Result
AgBB/ABG		Pass

ACOUSTIC PERFORMANCE	Standard	Result
Impact Sound Reduction	AS ISO 140-8	9dB

MAINTENANCE PERFORMANCE	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance

Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.



# Laneway Collection Shades

RANGE SHADES

14 Shades

Plank Size : 177.8 x 1219.2mm



**1039** WHITE OAK



**1041** COASTAL DRIFTWOOD



**1045** NATURAL OAK



**1080** BLONDE ASH



**1098** FRENCH WASHED OAK



**1094** BARNYARD OAK



**1096** COUNTRY ELM

Plank Size : 177.8 x 1219.2mm



**1053 FARMHOUSE GREY**



**1097 RIVER OAK**



**1042 SAPLE**



**1054 RICH OAK**



**1055 BUSHFIRE BLACK**

Plank Size : 185 x 1505mm



**1099 WEATHERED BIRCH**



**1095 SYDNEY SPOTTED GUM**

**R10** All designs achieve R10, which is an ex-factory measure of slip resistance